


ERGOTIG 17

T I G R A N G E

TECHNICAL DATA

Voltage class	L
Inert gas	Argon
Duty cycle 35% DC	140
Duty cycle 35% AC	125
Electrodes Ø mm	0.5 ÷ 2.4
Cooling	Air cooled

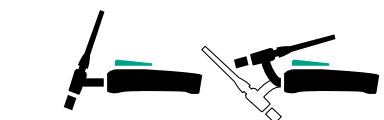

	SINTIG 17	SINTIG 17 FX	m
FITTING	SF 1401	SG 1401	4
	SF 1801	SG 1801	8
M12 x 1	SF 1402	SG 1402	4
3/8 G	SF 1802	SG 1802	8



	DUALTIG 17	DUALTIG 17 FX	m
FITTING	SF 2401	SG 2401	4
	SF 2801	SG 2801	8
M12 x 1			




	FRANTIG 17	FRANTIG 17 FX	m
FITTING	SF 3401	SG 3401	4
	SF 3801	SG 3801	8
M12 x 1			



	TIG 17 V	FREE 17	m
FITTING	SH 4401		4
	SH 4801		8
M12 x 1	SH 4402	SF 4402	4
3/8 G	SH 4802	SF 4802	8

Additional KIT	Ø
TT 0103	1.6
TT 0104	2.4
TT 0105	3.2



DECLARATION OF CONFORMITY

The undersigned company Trafimet - Via del Lavoro, 8 - 36023 Castegnero (VI) - Italy - declares that the product identified and described on this page complies with standard EN 60974-7 in accordance with the requirements contemplated by directive EEC 73/23 low voltage.



EN 60974-7

trafimet®

your welding partner

www.trafimet.com

ERGOTIG 17

T I G R A N G E

