


ERGOTIG 9


T I G R A N G E

TECHNICAL DATA


Voltage class	L
Inert gas	Argon
Duty cycle 35% DC	110
Duty cycle 35% AC	95
Electrodes Ø mm	0.5 ÷ 1.6
Cooling	Air cooled




	SINTIG 9	SINTIG 9 FX	m
FITTING	SA 1401	SB 1401	4
M12 x 1	SA 1801	SB 1801	8
FITTING	SA 1402	SB 1402	4
3/8 G	SA 1802	SB 1802	8

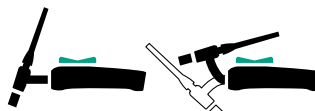

	DUALTIG 9	DUALTIG 9 FX	m
FITTING	SA 2401	SB 2401	4
M12 x 1	SA 2801	SB 2801	8




	FRANTIG 9	FRANTIG 9 FX	m
FITTING	SA 3401	SB 3401	4
M12 x 1	SA 3801	SB 3801	8



	TIG 9 V	FREE 9	m
FITTING	SC 4401	SA 4402	4
M12 x 1	SC 4801	SA 4802	8
FITTING	SC 4402		4
3/8 G	SC 4802		8

Additional KIT	Ø
TT 0103	1.6
TT 0104	2.4
TT 0105	3.2

	AUTOTIG 9	m
FITTING	SD 4401	4
M12 x 1	SD 4801	8



DECLARATION OF CONFORMITY

The undersigned company Trafimet - Via del Lavoro, 8 - 36023 Castegnero (VI) - Italy - declares that the product identified and described on this page complies with standard EN 60974-7 in accordance with the requirements contemplated by directive EEC 73/23 low voltage.




EN 60974-7

trafimet®

your welding partner

ERGOTIG 9

T I G R A N G E

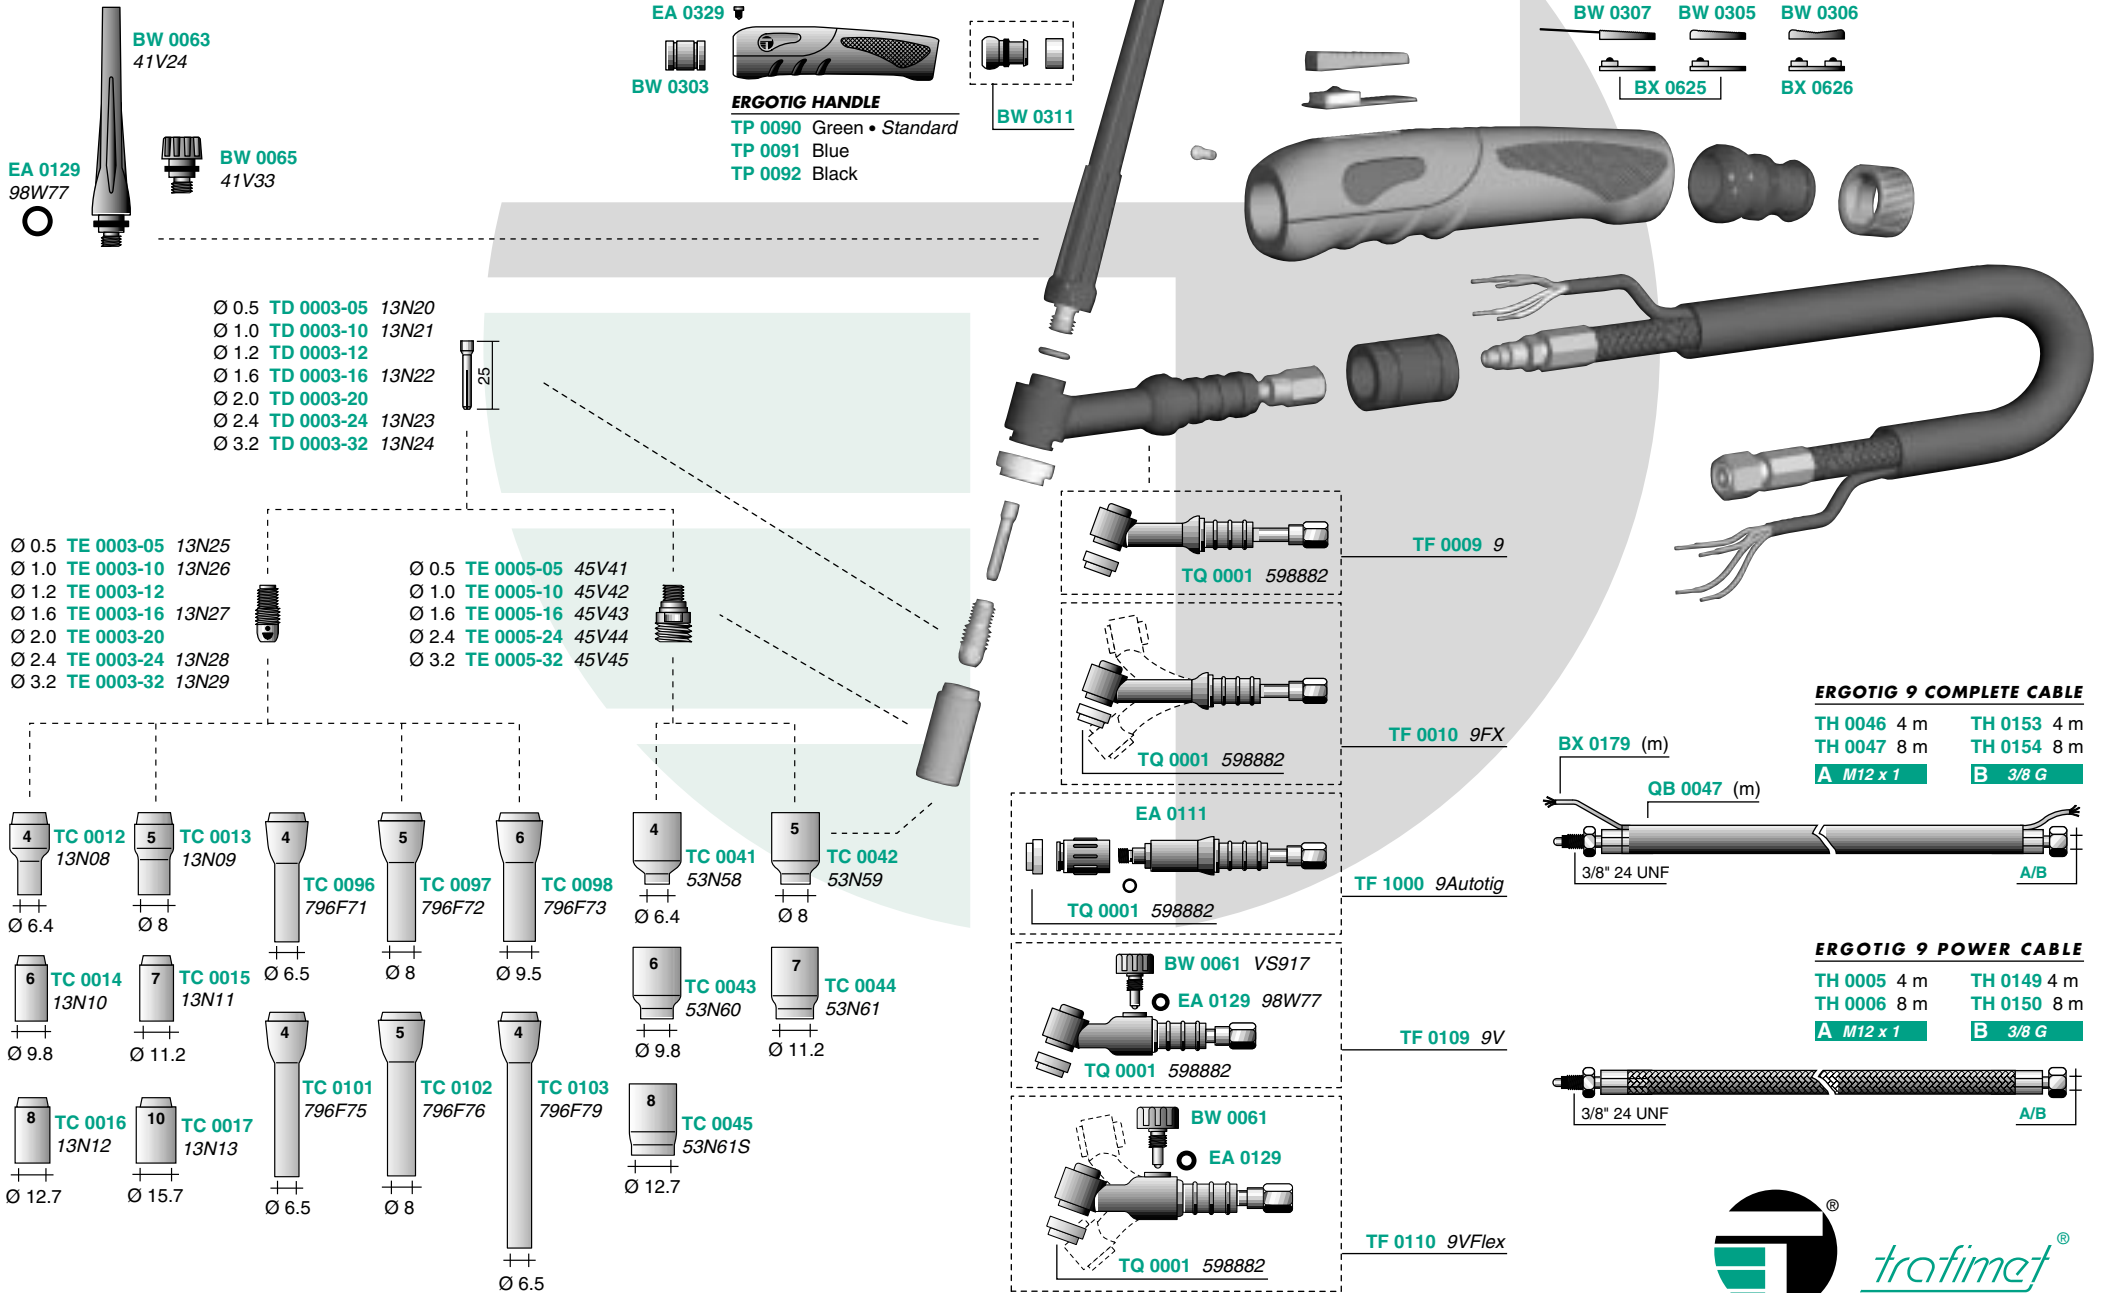

The company reserve the right to modify any products without notice. TRAFIMET spa is the registered owner of all trademarks, patents and models.

Copyright © 2000 Trafimet Spa. All rights reserved.
 Print date 09/01 - EA 0495



www.trafimet.com